


TO ATTACH PRESENTATION DRAPERY

1. Unfold valance bar and lock all latches.
2. Attach valance bar to screen frame by sliding the U shaped dress up hanger onto the shoulder rivets protruding from the screen frame. Attach valance drape to valance bar.
3. Attach wing arms to valance bar by sliding the U shaped dress up hanger onto the shoulder rivets protruding from the valance bar. Note the color coded tape. Attach wing drapes to wing bars. Observe stage left and stage right markings.
- 3A. If valance bar cannot be used, wing bars can be attached to screen frame. Fold wing drapes under at the floor.
4. Attach skirt by snapping onto the buttons on the bottom of screen surface.
5. If drapery kit has adjustable skirt bar, unfold skirt bar and lock all latches, attach U shaped hanger onto dress up rivets protruding from the screen frame near the bottom. To adjust skirt bar, loosen the two black knobs and slide skirt bar up to desired height.
- 5A. Screen may be lowered when skirt bar is raised, so that skirt will be near floor level.
6. If an adjustable steadyrest is provided, it should be placed in the center of the adjustable skirt bar to prevent it from sagging.



The
POWER *In*
PRESENTATION PRODUCTS

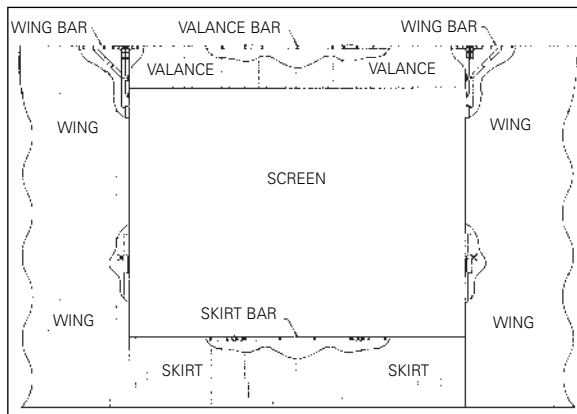

Installation Instructions for PRESENTATION DRAPERY



DA-LITE SCREEN COMPANY, INC.

3100 North Detroit Street
Post Office Box 137
Warsaw, Indiana 46581-0137
Phone: 574/267-8101
800-622-3737
Fax: 574/267-7804
[http:// www.da-lite.com](http://www.da-lite.com)
e-mail: info@da-lite.com