

The
POWER *In*
PRESENTATION PRODUCTS




**Instructions for
MODEL C FLOOR
STAND**

DA-LITE SCREEN COMPANY, INC.
3100 North Detroit Street
Post Office Box 137
Warsaw, Indiana 46581-0137
Phone: 574-267-8101
800-622-3737
Fax: 574-267-7804
www.da-lite.com
e-mail: info@da-lite.com

ASSEMBLING MODEL C BASE

1. Insert two round tubes (3) through end bracket (2) flush with outside of bracket. Tighten thumb screws (4).
2. Slide center bracket (1) in place on round tubes (3). Tighten thumb screws (4).
3. Place second end bracket (2) in position at opposite end in same manner as center bracket (1).
4. Insert assembled tube (11, 12, 13) in socket and lockspring lock.
5. Place screen case in end bracket (2) with slat and D-ring on top and centered with center bracket (1).
6. Raise screen and hook D-ring into safety-catch of hanger (8).

CAUTION! – Observe the following operating instructions and mechanical sequence carefully to avoid damaging your screen. **DO NOT RAISE** tubing beyond the standard vertical height of your particular Da-Lite screen.

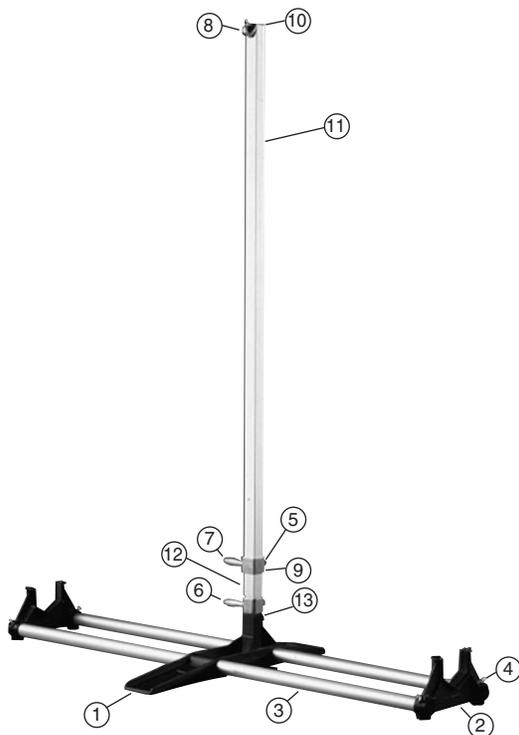

OPERATING INSTRUCTIONS MODEL C BASE

FOR 6' HEIGHT: Pull out springlock (5), then raise handle (7) until springlock locks securely at 1st position.

FOR 7' HEIGHT: Raise handle (7) until springlock locks securely at 2nd position.

FOR 8' HEIGHT: Raise handle (7) until springlock locks securely at 3rd position.

FOR 8 1/2' HEIGHT: Raise handle (7) until springlock locks securely at 4th position.

FOR 9' HEIGHT: Raise handle (7) until spring locks securely at 4th position. Then raise handle (6) until springlock locks securely at 2nd position.

FOR 10' HEIGHT: Raise handle (7) until spring locks securely at 4th position. Then raise handle (6) until springlock locks securely at 3rd position.

FOR 12' HEIGHT: Raise handle (7) until spring locks securely at 4th position. Then raise handle (6) until springlock locks securely at 6th position.

TO CLOSE STAND

Lower handle (6) to bottom position, then lower handle (7) to bottom position.

