


TENSIONED COSMOPOLITAN ELECTROL®

Automatic Electric Projection Screen

When ordering, make appropriate selections:

- Select size from charts at the lower right.
- Select viewing surface:
 - Da-Mat™
 - High Contrast Da-Mat™
 - Cinema Vision
 - High Contrast Cinema Vision
 - Pearlescent
 - Audio Vision
 - High Contrast Audio Vision
 - High Contrast Cinema Perf
 - Da-TeX™ (Rear)
 - Dual Vision
- Options:
 - Floating Mounting Bracket allows the screen to be mounted either on the wall or ceiling at most secure position. Available in black or white.
 - No. 6, 6" Non-adjustable extension brackets.
 - No. 11, 10" or 14" Non-adjustable extension brackets.
 - No. 23, 14 1/2" - 24" adjustable extension brackets.
 - Single Motor Low Voltage Control System—Three Button.
 - Wireless Remote Control for L.V.C. system.
 - Radio Frequency Remote
 - Infrared Remote
 - Ivory Control Switch to replace Standard White.
 - Stainless Steel Control Switch to replace Standard Switch.
 - Locking Switch Cover Plate for 120V or L.V.C. Switch.
 - Key-Operated Switch for 120V only (NOTE: Cannot be used with low-voltage system).
 - 220V (50 Hz) Motor.
 - Video Projector Interface Control, 12V or 5V.
 - External SCB-100 RS-232 Serial Control Board.
 - NET-100 Ethernet-Serial Adapter.
 - Ceiling Trim Kit.

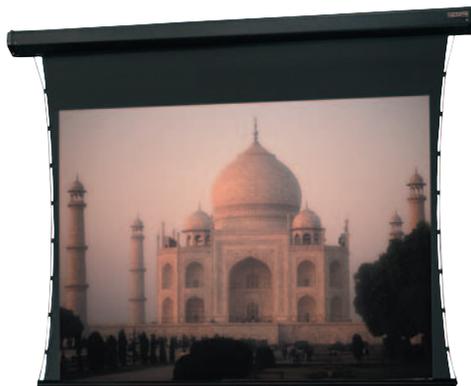

- High quality electric screen.
- Easy to install.
- Patented rubber mounting system for in-the-roller motor.
- Tab guide cable system holds screen surface flat.

SUGGESTED SPECIFICATIONS:


_____ projection screens, _____ (H) x _____ (W), electrically operated 120 volt (60 Hz) 1.4 amp. To have Da-Mat, High Contrast Da-Mat, Pearlescent, Cinema Vision, High Contrast Cinema Vision, High Contrast Cinema Perf, Audio Vision, High Contrast Audio Vision, Da-TeX (Rear) or Dual Vision seamless surfaces with black masking borders standard on flame retardant and mildew resistant fabric mounted on 3-3/16" diameter rigid metal roller. Each side of the fabric to have tab guide cable system to maintain even lateral tension and hold surface flat. Custom slat bar with added weight maintains vertical tension on the screen surface. Shall have specially designed motor mounted inside the roller with a patented noise silencer, to be three wire quick reversal type, capacitor and an electric brake to prevent coasting. To have preset but adjustable limit switches to automatically stop picture surface in the "up" and "down" position. Case to be painted black 21-gauge steel, hexagon in shape with flat back to prevent scraping fabric. Finished in black enamel paint. Case end caps to be heavy duty, allowing no exposed roller pins. Caps shall form sturdy brackets for wall or ceiling installation. To be complete with three position control switch with cover plate. Screen to be listed by Underwriters' Laboratories and CSA.




All viewing surfaces will be seamless. Audio Vision, High Contrast Audio Vision and High Contrast Cinema Perf available in sizes up to 8' in height. All viewing surfaces are standard with black backing except Da-TeX and Dual Vision.

Detailed dimensional drawings, wiring diagrams and installation instructions available upon request. Specifications subject to change without notice.


Ceiling Mounted






Concealed



Wall-Mounted



Use No. 6 Brackets To Hang Behind Beam Or Valance



VIDEO FORMATS

Viewing Area H x W	Nominal Diagonal	Overall Case Length	Between Hanger Eyes	Approx. Shipping Wt. Lbs.
43" x 57"	72"	75"	73-1/2"	61
50" x 67"	84"	86"	84-1/2"	67
60" x 80"	100"	100"	98-1/2"	76
69" x 92"	120"	114"	112-1/2"	85
87" x 116"	150"	141"	139-1/2"	104
108" x 144"	180"	166"	164-1/2"	122
120" x 160"	200"	183"	181-1/2"	134

HDTV FORMATS

Viewing Area H x W	Nominal Diagonal	Overall Case Length	Between Hanger Eyes	Approx. Shipping Wt. Lbs.
45" x 80"	92"	98-1/2"	97"	67
52" x 92"	106"	111"	109-1/2"	74
54" x 96"	110"	115-1/2"	114"	79
58" x 104"	119"	124"	122-1/2"	85
65" x 116"	133"	137"	135-1/2"	104
78" x 139"	159"	162"	160-1/2"	122

DIMENSIONS

Viewing Area H x W	Overall Case Length	Between Hanger Eyes	Approx. Shipping Wt. Lbs.
50" x 50"	69"	67-1/2"	56
60" x 60"	80"	78-1/2"	63
70" x 70"	91-1/2"	90"	70
84" x 84"	108"	106-1/2"	78
6' x 8'	118"	116-1/2"	85
8' x 8'	121-1/2"	120"	87
7' x 9'	132"	130-1/2"	89
9' x 9'	130-1/2"	129"	92
8' x 10'	145-1/2"	144"	104
10' x 10'	142-1/2"	141"	112
9' x 12'	166"	165"	122

Overall case length dimensions ± 1/4".
Note: All sizes come standard with 12" black drop at top, except 200" diagonal which has only 4" of drop. Extra drop may alter dimensions. Contact Da-Lite for details.
Note: Letterbox formats and custom sizes available upon request.

FLOATING MOUNTING BRACKET



CEILING TRIM KIT

